




piSmart-Gateway

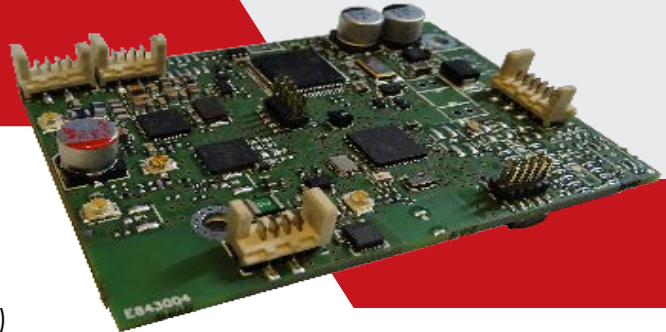

Features

- Innovative module for IoT, tracking, data logging, fleet management and access solutions
- GPS /GSM Tracker (location- and time monitoring)
- SIM-Chip data contract (optional)
- LoRaWAN
- Bluetooth Low energy (v4.0)
- Lithium-Ionen-battery interface
- Visual and acoustic signal transmitters
- RFID-Reader (13,56MHz)
- UART / LIN / CAN / CANopen interface



Overview

Flexible Gateway for mobile und stationary applications. The device is applicable as data interface, data-logger or as configurable management device for vehicles.

The piSmart-Gateway collect position or operating data and conduct these over available data interfaces to higher-level systems. These systems can be local computer or internet-based cloud solutions.

The device allows the uncomplicated development of innovative sensor networks.

The internet portal www.pironex-server.de enables the configuration, management and monitoring of the devices.

Native Apps for Android, iOS and Windows 10 are available for the visualisation of the data.

Details

Basics

Supply voltage	6,5-55V DC / Dynamo voltage 6V
Battery	internal rechargeable supporting battery
Antenna	passive und fanless cooling
Temperatur range	internal or external GSM/GPS antenna(optional)
Dimensions	-10 bis +60°C 66 x 47mm x 8mm (T/B/H)

Other characteristics

Sensors	3G motion sensor
Memory	FRAM
RTC	real-time clock
IO-interfaces	3 x inputs / 6 x outputs

Interfaces

CAN	CAN-Bus
LIN	LIN Master /Slave
Bluetooth	4.1 Bluetooth Low Energy
RFID	RFID-Reader (13,56 MHz RFID-Reader)